




# BUILDING & CAMPING CAR INDUSTRIES

## KISO 358

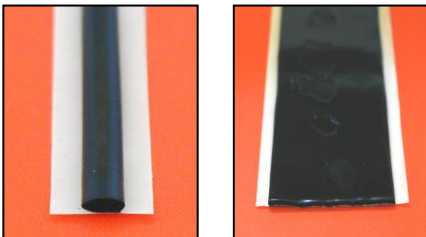

### TECHNICAL DATA

Density:	1,58 g/cm <sup>3</sup>
Needlepenetration (23°):	70 dmm
Temp. resistance:	-30°C to +70°C
Dry matter:	>99%
Health hazard:	None
Water absorption:	Negligible
Resistance to UV-light:	Excellent

### PROPERTIES

Base material:	Butyl rubber
Color:	Black, white and grey
Type:	Plastic
Adhesion:	Good on metal, glass, wood and concrete
Aging:	Good

### SHELF LIFE

At least two years from date of manufacture under normal storage conditions.

### PRODUCT

The KISO 358 Butyl is an extruded and self adhesive butyl sealing strip.

### TYPICAL APPLICATIONS

Different possible application areas within:

- Roofing
- Metal constructions, containers, cold stores
- Camping cars, motorhomes and mobilehomes

### ADVANTAGES

- Very good adhesion power on most materials
- No fumes, solvent free
- Non hardening, permanently elastic
- Leaves hands and application surfaces clean
- Very long durability
- Free from harmful substances

### MAIN SIZES

(One pallet contains 48 cartons)

Thickness (mm)	Width (mm)	Meter per roll	Rolls per carton	Meter per pallet	Colour
1,0	15	40	12	23.040	Black
1,0	40	40	5	9.600	White
1,0	50	40	4	7.680	White
1,2	25	30	8	11.520	White
1,5	20	28	9	12.096	Grey
1,5	25	28	8	10.752	Grey
1,5	40	28	5	6720	Grey
2,0	15	20	12	11.520	Grey
Diameter	6,0	8	16	6.144	Grey
Diameter	8,0	6	12	3456	Grey

### APPLICATION

Application temperature: higher than 5°C.

Application method: by hand directly from the reel; apply the KISO 358 Butyl firmly on one surface, remove the protection paper and apply the other surface firmly on the strip surface.

Surface preparation: must be clean, dry, grease- and dustfree.