




KISO E

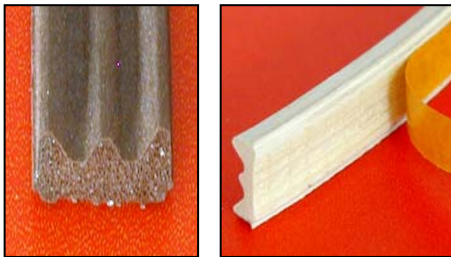

TECHNICAL DATA

Density:	0,25-0,40 g/cm ³
Nominal:	0,28 g/cm ³
Hardness shore 00:	40-50
Temp. resistance:	-50°C to +90°C
Health hazard:	None
Water absorption :	Negligible
Resistance to ozone:	Excellent

PROPERTIES

Base material:	EPDM rubber
Color:	Brown, white and grey
Adhesion:	Excellent on dry surfaces

SHELF LIFE

Up to 9 months from date of manufacture under normal storage conditions.

THE DOOR & WINDOW INDUSTRY

PRODUCT

The KISO E Profile is an extruded and self adhesive EPDM cellular rubber sealing strip.

TYPICAL APPLICATIONS

Windows & doors : draught excluder for smaller gaps in older frames

ADVANTAGES

- Easy to compress
- Quick, easy and clean to use
- Very good aging properties
- Good resistance to solvents
- Available in 4 different packaging
- Free from harmful substances

MAIN SIZES

(One pallet contains either 32 cartons or 14 industrial reels / Jumbo)

Type	Thickness (mm)	Width (mm)	Strips per band	Meters per reel	Reels per carton	Meters per pallet
	3	9	1	150	6	28.800
I	3	9	2	150	6	28.800
AA-10	3	9	2	10	108	34.560
	4	9	1	125	6	24.000
I	4	9	2	120	6	23.040
AA-10	4	9	2	10	96	30.720

Type	Thickness (mm)	Width (mm)	Strips per band	Meters per reel	Reels per pallet	Meters per pallet
J-12	3	9	12	200	14	33.600
J-12	4	9	12	200	14	33.600

I = double strip, AA = cut & coiled, J = jumbo

APPLICATION

Application temperature: higher than 0°C.

Application: by hand directly from reel.

Surface preparation: must be clean, dry, and free from grease and dust.