

# **KISO 501 Butyl – Aluminium coated butyl**

---

## **Glass wall**


When putting up a Glass wall KISO 501 Butyl is used as a secondary sealing underneath the aluminium bars. The purpose is to prevent water from penetrating the gap between the windows, should any water penetrate the glass wall in itself.

1.



This is what the glass wall looks like after mounting the KISO 501 Butyl over the gap between the windows.

2.

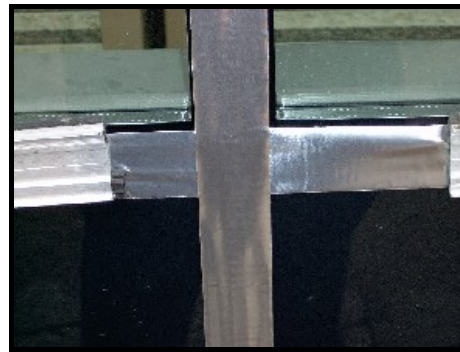

This is a cross in connection with the gap between the windows. Please notice that the horizontal sealing strip is mounted underneath the vertical sealing strip.

3.



This is a cross in one side of the construction. Please note that the horizontal sealing strip is once again mounted underneath the vertical one. This is to ensure that water can run freely downwards.

4.



This is a cross in the bottom of the construction. Please note the placement of the sealing strips again.