

KISO 512 Butyl – PP-coated butyl

Wet rooms


In a bathroom KISO 512 Butyl is used as a reinforcement of the transition between walls and between walls and floor. This is mounted before the liquid membrane is applied on the walls and floor. KISO 512 Butyl is tested and approved by several producers of wet room solutions.

1.



This is a corner. Please note that the vertical sealing strip is mounted first, so that the horizontal sealing strip covers this. The horizontal sealing strip is applied without brakes all around the floor area.

2.

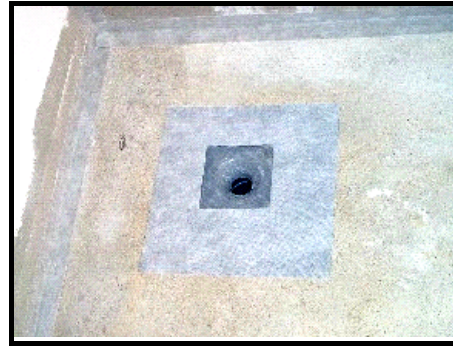

The butyl collar is applied over the drainage pipe and pressed over the edge. This is to ensure the sealing of the drainage pipe. Surplus material is cut off using a knife.

3.



View of the butyl collar directly from above.

4.



This is what the completed wet room looks like before the liquid membrane is applied.