




## KISO P

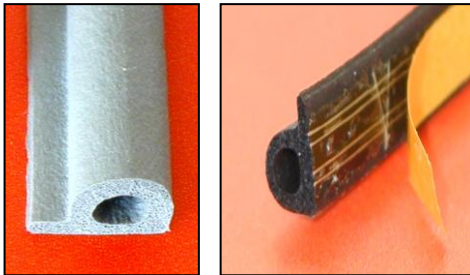

### TECHNICAL DATA

Density:	0,25-0,40 g/cm <sup>3</sup>
Nominal:	0,28 g/cm <sup>3</sup>
Compressive force to reduce:	
- 25% =	0,65 N/cm
- 40% =	1,2 N/cm
Temp. resistance:	-50°C to +90°C
Health hazard:	None
Water absorption :	Negligible
Resistance to ozone:	Excellent

### PROPERTIES

Base material:	EPDM rubber
Color:	Black, brown, white
Adhesion:	Excellent on dry surfaces

### SHELF LIFE

Up to 9 months from date of manufacture under normal storage conditions.

# THE DOOR & WINDOW INDUSTRY

## PRODUCT

The KISO P Profile is an extruded and self adhesive EPDM cellular rubber sealing strip.

## TYPICAL APPLICATIONS

Windows & doors : draught excluder for medium gaps in older frames

## ADVANTAGES

- Easy to compress
- Quick, easy and clean to use
- Very good aging properties
- Good resistance to solvents
- Available in 4 different packaging
- Mounting can be strengthened with stitches
- Free from harmful substances

## MAIN SIZES

(One pallet contains 32 cartons)

Type	Thick-ness (mm)	Width (mm)	Strips per band	Meter per reel	Reels per carton	Meter per palle	Colour
I	5,5	9	2	100	6	19.200	Black/ White/brown
I/PB	5,5	9	2	160	3	15.360	Black/brown

I = double strip, PB = larger reels

## APPLICATION

Application temperature: higher than 5°C.

Application: by hand directly from reel.

Surface preparation: must be clean, dry, and free from grease and dust.